




PCT/GB 2004 / 0 0 4 2 6 6

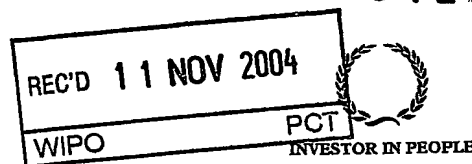

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.


In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 27 October 2004

PRIORITY DOCUMENT
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH
RULE 17.1(a) OR (b)

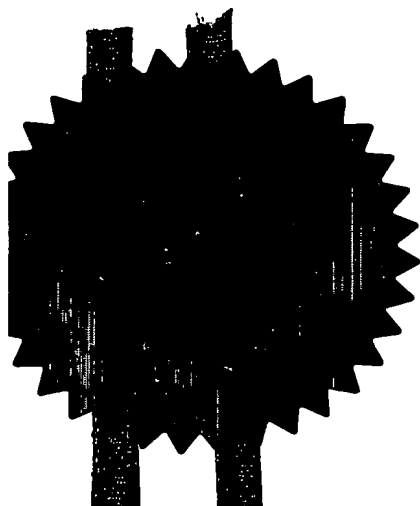



100CT03 EB43505-1 D00001
P01/7700 0.00-0323698.1

1777

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)



The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

1. Your reference 9676 GB JEB/VSB

9 OCT 2003

2. Patent application number
(The Patent Office will fill this part in)

0323698.1

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Saipem UK Limited
EMC House
Station Road
Motspur Park
New Malden
Surrey KT3 6JJ

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

United Kingdom

7816549 002

4. Title of the invention Apparatus and Method for Reducing Motion of a Floating Vessel

5. Name of your agent (if you have one)

Abel & Imray

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

20 Red Lion Street
London
WC1R 4PQ
United Kingdom

Patents ADP number (if you know it)

174001

6. Priority: Complete this section if you are declaring priority from one or more earlier patent applications, filed in the last 12 months.

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. Divisionals, etc: Complete this section only if this application is a divisional application or resulted from an entitlement dispute (see note f)

Number of earlier UK application

Date of filing
(day / month / year)

8. Is a Patents Form 7/77 (Statement of inventorship and of right to grant of a patent) required in support of this request?

Yes

Answer YES if:

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an applicant, or
- c) any named applicant is a corporate body.

Otherwise answer NO (See note d)

Patents Form 1/77

9. Accompanying documents: A patent application must include a description of the invention. Not counting duplicates, please enter the number of pages of each item accompanying this form:

Continuation sheets of this form

Description 17 ✓

Claim(s) 8 ✓

Abstract

Drawing(s) 6 + 6 ✓

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for a preliminary examination and search (Patents Form 9/77) Yes ✓

Request for a substantive examination (Patents Form 10/77)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature(s)

Abel and Imray

Date 9 October 2003

12. Name, daytime telephone number and e-mail address, if any, of person to contact in the United Kingdom
- Victoria Bradford - 020 7242 9984

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered YES in part 8, a Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- Part 7 should only be completed when a divisional application is being made under section 15(4), or when an application is being made under section 8(3), 12(6) or 37(4) following an entitlement dispute. By completing part 7 you are requesting that this application takes the same filing date as an earlier UK application. If you want the new application to have the same priority date(s) as the earlier UK application, you should also complete part 6 with the priority details.

Apparatus and Method for Reducing Motion of a Floating Vessel

The present invention relates to an apparatus and method for
 5 reducing motion of a floating vessel. In particular, but not
 exclusively, the invention relates to an apparatus and method
 for reducing the roll of a floating vessel.

It is well known that ships, barges and other floating
 10 platforms roll, pitch and heave at sea and that such motion
 is undesirable in many fields. For example, such motion may
 be particularly undesirable when loading and unloading to and
 from the vessel. This is particularly the case for vessels
 involved with the offshore oil and gas industries. In that
 15 application it is common to unload and load, from and to a
 stationary structure e.g. a deck supported on a jacket on the
 sea bed or from and to another vessel.

Additionally, in the field of offshore gas and oil, the
 20 vessels may be extremely large so that, whilst the movement
 of the vessel is not very great when expressed in degrees of
 inclination, the movement at deck height is considerable,
 causing difficulties even in relatively calm conditions.

25 There are many known systems which aim to reduce roll and/or
 pitch motion of floating vessels. For example, GB 2219973
 describes a vessel in the hull of which there is a passageway
 which allows the free flow of water through it. As the
 passageway fills and drains, the natural period of the
 30 pitching/rolling motion is increased and the motion response
 of the vessel is reduced. In an improvement on this
 arrangement, such a tank may be connected to a pump so that
 the filling and draining of the tank can be controlled at
 least partially. However, such systems are integral with the

vessel itself and are difficult to install and costly and are not able to be easily transferred from one vessel to another.

Another system which aims to reduce vessel instability is
5 described in US 5787832. In that system, stabilizer
assemblies are attached to the hull of the vessel. Each
assembly includes an outrigger arm and a float arm which has
a float attached to one end. The floats are in contact with
the water surface at all times and the system works by
10 increasing the effective width of the vessel so as to
increase the natural period of its rolling/pitching motion.
Each stabilizer assembly has to be attached to the vessel
through a very strong fastening that has to bear very high
loads.

15

It is an object of the invention to provide an apparatus and
method which avoids or mitigates the problems of known
stabilizing systems described above.

20 According to a first aspect of the invention, there is
provided a vessel comprising a first stabilizer assembly and
a second stabilizer assembly, each stabilizer assembly
comprising:

at least one submergible at least partially hollow
25 body; and

suspending means for suspending the or each body
from the vessel,
the first and second stabilizer assemblies being suspended
from substantially opposite sides of the vessel.

30

Such stabilizer assemblies can be installed in port or at sea
and are able to be adapted to be used with any suitable
vessel. Because they are at least partially hollow, they can
be relatively large for a given mass and the suspending of

the assemblies from the vessel can be accomplished relatively easily.

Typically, one stabilizer assembly is suspended from the port side of the vessel and one stabilizer assembly is suspended from the starboard side of the vessel. This reduces the roll of the vessel. The invention is, however, applicable to any kind of vessel some of which may not have clearly defined port and starboard sides (or bow and stern ends). It should be understood, however, that what are referred to herein as the sides of the vessel are those parts of the vessel that rise and fall when the vessel undergoes a rocking motion. The term does not necessarily refer to the port and starboard sides of the vessel.

15

Often the first stabilizer assembly will comprise a single submergible body but it may comprise:

a first submergible at least partially hollow body
and a second submergible at least partially hollow body;

20 first suspending means for suspending the first
body from the vessel; and

second suspending means for suspending the second
body from the first body.

25 Similarly, the second stabilizer assembly will often comprise a single submergible body but it may comprise:

a first submergible at least partially hollow body
and a second submergible at least partially hollow body;

30 first suspending means for suspending the first
body from the vessel; and

second suspending means for suspending the second
body from the first body.

The vessel may further comprise a third stabilizer assembly, the third stabilizer assembly comprising:

at least one submergible at least partially hollow body; and

5 suspending means for suspending the or each body from the vessel.

In one embodiment, the first stabilizer assembly is suspended near the bow of the vessel on one side, the third stabilizer
10 assembly is suspended near the stern of the vessel on said one side and the second stabilizer assembly is suspended amidships on the other side of the vessel.

The above embodiments using three stabilizer assemblies are
15 known as asymmetric arrangements.

Like the first and second stabilizer assemblies, the third stabilizer assembly may comprise:

a first submergible at least partially hollow body
20 and a second submergible hollow body;

first suspending means for suspending the first body from the vessel; and

second suspending means for suspending the second body from the first body.

25

The vessel may further comprise a fourth stabilizer assembly, the fourth stabilizer assembly comprising:

at least one submergible at least partially hollow body; and

30 suspending means for suspending the or each body from the vessel.

The fourth stabilizer assembly may be suspended from the port or starboard side of the vessel.

In one embodiment, the first stabilizer assembly is suspended near the bow of the vessel on one side, the second stabilizer assembly is suspended near the bow of the vessel on the other side, the third stabilizer assembly is suspended near the stern of the vessel on said one side and the fourth stabilizer assembly is suspended near the stern of the vessel on the other side.

10 In another embodiment, the first stabilizer assembly is suspended near the bow of the vessel on one side, the second stabilizer assembly is suspended near the stern of the vessel on said one side and the third and fourth stabilizer assemblies are suspended amidships on the other side of the vessel.

It will be understood that the assemblies may be arranged in any of a wide variety of configurations. If the submergible bodies of the assemblies are all of substantially the same size, then it may be advantageous for the same number of bodies to be provided on each side of the vessel.

The reduction of vessel motion relies upon the suspending means being able to apply downwardly directed loads resisting upward movement and the suspending means is therefore advantageously capable of bearing high tension loads. Whilst the suspending means may be capable of bearing high compressive loads too, that is not necessary and it may be more economical and simple not to provide for that. Thus the suspending means may be capable of bearing tension loads of more than one hundred times the loads it is capable of bearing in compression. The suspending means may comprise elongate flexible members, for example, chains, ropes or cables.

Each body is preferably large. Thus in a case where each body is elongate, it may have a cross-sectional area greater than 4 m^2 and preferably greater than 10 m^2 . Each body may
5 comprise one or more closed or closable spaces having a combined volume of more than 50 m^3 and preferably more than 300 m^3 .

The or each body may comprise at least one ballast tank.
10 Preferably, the or each body comprises a plurality of ballast tanks, each separately ballastable. If the bodies are ballastable, the bodies can be suitably ballasted so that the rolling can be controlled to be dependent on the force and period of the waves. Thus, the amount of damping of the
15 rolling motion can be adjusted according to the conditions. In addition, if it is required to unload or load from or to the vessel to or from another vessel, the amount of damping can be adjusted to bring the vessel into line with the other vessel so that unloading and loading is facilitated.

20 Preferably, each stabilizer assembly further comprises at least one fin projecting from the or each body. The fins increase the drag on the bodies as they move through the water.

25 The size and shape of the fins is variable. For example, the fins may be straight or curved. In one embodiment, the at least one fin is pivotable relative to the or each body to restrict movement of the body in one direction (upwardly
30 through water) more than in another direction (downwardly). This is useful because it is often required that there is more drag on the bodies when they are moving vertically upward than when they are moving vertically downward and the fins can be pivotable accordingly. Alternatively, the fins

can be shaped be so that there is more drag in one direction than in the other direction.

Preferably, each body is substantially prism shaped. In one
5 embodiment, the body is in the form of a tube.

The prism may have a round, and preferably a circular, cross section. Alternatively, the prism may have a rectangular cross section, for example a square cross section.

10 Alternatively, the prism may have a triangular cross section.

In one embodiment, one or both ends of the prism are substantially conical. This is advantageous because it facilitates transport. The bodies may, for example, be
15 attached to the vessel to be towed beneath the water line to the desired location, at which point they can be attached the vessel at the appropriate points. Having conical ends facilitates towing. The bodies may alternatively have hemispherical or rounded ends or any other shape which
20 facilitates towing.

The vessel may further comprise saddles for attaching to the vessel, to support the suspending means. The saddles may be attached at the edge of the deck of the vessel at the port or
25 starboard side. The saddles may be attached when the vessel is in port or when the vessel is at sea. The saddles extend the width of the vessel so that the bodies are suspended from points which are slightly further apart than the width of the vessel itself.

30

The suspending means of the first stabilizer assembly may be connected to the suspending means of the second stabilizer assembly. That connection is preferably a structural connection made directly or indirectly. If made indirectly

it is preferably made through an additional structure separate from the vessel structure.

According to a second aspect of the invention, there is
5 provided an apparatus for reducing vessel motion comprising:
a first stabilizer assembly and a second stabilizer assembly, each stabilizer assembly comprising:

at least one submergible at least partially hollow body; and

10 suspending means for suspending the or each body from the vessel,
the first and second stabilizer assemblies being suitable for locating at substantially opposite portions of the vessel.

15 The or each body may comprise at least one ballast tank. Preferably, the or each body comprises a plurality of ballast tanks, each separately ballastable.

Preferably, each stabilizer assembly further comprises at
20 least one fin projecting from the or each body. Even more preferably, the at least one fin is pivotable relative to the or each body to restrict movement of the body in one direction more than in another direction.

25 Advantageously, the or each body is substantially prism shaped. In one embodiment, the prism has a round, and preferably a circular, cross section. In another embodiment, the prism has a rectangular cross section, for example a square cross section. In another embodiment, the prism has a
30 triangular cross section.

One or both ends of the prism may be substantially conical, hemispherical or rounded. This facilitates transport by towing.

The apparatus may further comprise saddles for attaching to the vessel, to support the suspending means. The saddles may be attached at the edge of the deck of the vessel at the port or starboard side. The saddles may be attached when the vessel is in port or when the vessel is at sea. The saddles extend the width of the vessel so that the bodies are suspended from points which are slightly further apart than the width of the vessel itself. This further stabilizes the vessel.

10

Preferably, the suspending means of the first stabilizer assembly is connected to the suspending means of the second stabilizer assembly. That connection is preferably a structural connection made directly or indirectly. If made indirectly it is preferably made through an additional structure separate from the vessel structure.

According to a third aspect of the invention, there is provided a submergible body in the form of an at least partially hollow tube, for reducing motion of a water-borne vessel comprising:

20
25

- at least one ballast tank; and
- at least one projecting fin for increasing the drag of the body through water.

Preferably the body comprises a plurality of ballast tanks, each separately ballastable.

In one embodiment, the tube has a circular cross section. In another embodiment, the tube has a rectangular cross section, for example a square cross section. In another embodiment, the tube has a triangular cross section.

One or both ends of the tube may be substantially conical. This facilitates transport of the tubes by towing.

Alternatively, one or both ends of the tube may be rounded or hemispherical or any other shape which facilitates transport
5 by towing.

The or each fin may be pivotable relative to the tube to restrict movement of the body through water in one direction more than in another direction.

10

According to a fourth aspect of the invention, there is provided a method for reducing motion of a water-borne vessel comprising:

suspending at least two at least partially hollow
15 bodies below the water line from substantially opposite portions of the vessel.

Preferably, the method further comprises ballasting the or each body.

20

It should be understood that in the description above, where a feature is described with regard to one aspect of the invention, it may also where appropriate be employed in respect of another aspect of the invention. Thus, for
25 example, the method of the fourth aspect of the invention may be employed with a vessel of any of the forms defined according to the first aspect of the invention.

An embodiment of the invention will now be described with
30 reference to the accompanying drawings of which:

Figure 1 is a plan view of a vessel including stabilizing apparatus according to the invention;

Figure 2 is a side elevation view of the vessel of Figure 1;

5 Figure 3 is a front elevation view of the vessel of Figures 1 and 2;

Figure 4 is a plan view of a vessel having a first alternative stabilizing arrangement;

10 Figure 5 is a side elevation view of the vessel of Figure 4;

Figure 6 is a plan view of a vessel having a second alternative stabilizing arrangement;

15

Figure 7 is a side elevation view of the vessel of Figure 6;

Figure 8 is a plan view of a stabilizing tube;

20

Figure 9 is a side elevation view of the tube of Figure 8;

Figure 10 is a cross sectional view of a stabilizing tube having an alternative construction;

25

Figure 11 is a cross sectional view of a stabilizing tube; having a second alternative construction;

30 Figure 12 is a cross sectional view of a stabilizing tube having a third alternative construction; and

Figure 13 is a plot showing the effect of the stabilizing arrangement on the degree and period of rolling motion.

5 Figures 1, 2 and 3 show a vessel 2 having a stern 4, a bow 6, a port side 8, a starboard side 10 and a deck 12. Suspended from the vessel are four tubes 14, two tubes close to the port side 8 and two tubes close to the starboard side 10. One port side tube 14a is located near the bow of the vessel. One
10 port side tube 14b is located near the stern of the vessel. One starboard side tube 14c is located near the bow of the vessel. One starboard side tube 14d is located near the stern of the vessel. Each tube 14 is suspended from the vessel by two chains 16. The chains 16 from opposite tubes 14a, 14c and
15 14b, 14d are linked close to the centre of the deck 12.

Saddles 18 located at the edge between the deck 12 and the port side 8 and the deck 12 and the starboard side 10, support the chains 16. This ensures that the chains 16 remain
20 clear of the sides of the vessel even when the vessel rolls a certain amount.

Each tube 14 is substantially cylindrical. Each tube includes a number of ballast tanks (not shown) which can be separately
25 ballasted and deballasted thus allowing the mass of the tubes 14 in the water to be controlled. Each tube 14 also includes two horizontal fins 22. The horizontal fins 22 impede movement at speed of the tubes 14 in the vertical direction.

30 As the vessel rolls, the port side 8 and the starboard side 10 alternately rise and fall. As the port side 8 rises, the port side tubes 14a and 14b are required to move upwards and the mass of the tubes and the projecting fins impede that upwards motion. More particularly, the necessary acceleration

upwards of the tubes is limited by the inertia of the tubes, whilst the tubes and fins are also resistant to travel through the water at high velocity. Similarly, as the starboard side 10 rises, the starboard side tubes 14c and 14d are required to move upwards and the mass of the tubes and the projecting fins impede that upwards motion. Thus the rolling motion of the vessel 2 is reduced; the degree of rolling is reduced and the period of the motion is increased i.e. the frequency is reduced.

10

The tubes, chains and saddles may be attached to the vessel in port or at sea.

The diameter and length of each tube is variable to suit the application. The material used to construct the tube is variable and this will depend upon the desired mass of each tube. The mass of each tube affects the acceleration of the tubes through the water. The number of ballast tanks in each tube is variable and the tubes are designed to be ballastable on deck so that the tubes can easily be towed in the water to facilitate transport. The cross section of the tubes is also variable (see Figures 10 to 12). The tubes may have conical ends in order to facilitate transport. The length of the chains is also variable. The size and shape of the fins is variable and the fins may be pivotable in relation to the tube such that, as the tube moves vertically upwards the fins project horizontally to impede the upwards motion, but as the tube moves vertically downwards the fins pivot inwards so as not to impede the downwards motion. The size and shape of the fins affect the speed of the tubes through the water.

30

In one embodiment, the tubes are 40m long, with conical ends, and 5m in diameter. Each tube weighs 200 tonnes and comprises ten separate ballast tanks. Each tube has two projecting 75

cm fins, which extend along all of the tube and cones. The tubes can be suspended 25m below the water line.

Figures 4 and 5 show an alternative arrangement for the tubes on the vessel. This is known as the asymmetric arrangement. In this case two tubes 14 are suspended close to the port side 8 and one tube is suspended close to the starboard side 10. One port side tube 14a is located near the bow of the vessel and one port side tube 14b is located near the stern of the vessel. The starboard side tube 14c is located amidships. Of course, there could alternatively be two tubes on the starboard side and only one tube on the port side.

Figures 6 and 7 show another alternative arrangement for the tubes on the vessel. This is known as the ladder arrangement. In this case two tubes 14 are suspended close to the port side 8 and two tubes are suspended close to the starboard side 10. One port side tube 14a is located near the bow of the vessel and one port side tube 14b is located near the stern of the vessel. Both starboard side tubes are located amidships, the second starboard side tube 14d being suspended beneath the first starboard side tube 14c. Of course, there could alternatively be two tubes amidships on the port side, one stern starboard side tube and one bow starboard side tube.

Alternative arrangements are also envisaged, which are not explicitly illustrated, for example a double ladder arrangement having two tubes amidships on the port side and two tubes amidships on the starboard side.

Figures 8 and 9 show the tubes 14 in more detail. Each tube 14 has two horizontal fins 22 projecting from the tube 14. Each tube 14 also has lifting points 24 shown schematically

in Figures 8 and 9. On the tube 14 shown in Figure 9 there are four lifting points 24, two on the upper side of the tube and two on the lower side. The two lifting points 24 on the upper side allow the chains 16 to be attached for suspending the tubes from the vessel. The two lifting points 24 on the lower side are only useful when the tube is used in the ladder arrangement shown in Figures 6 and 7. However, in many cases, it is advantageous for all the tubes to have four lifting points 24 so that the construction of every tube is the same and any tube can be used in any application.

Figures 10 and 11 show a tube 14 having a square cross section. Such a cross section gives the tube a greater drag through the water. In Figure 10 the horizontal fins project from the side of the square tubes. In Figure 11, the horizontal fins project from the base of the square tubes.

Figure 12 shows a tube 14 having a triangular cross section. Such a cross section gives the tube increased drag when moving vertically upward but reduced drag when moving vertically downward. As the vessel rolls, the port side and the starboard side alternately rise and fall. As the port side falls, the tubes on the port side are required to move downwards through the water. It is therefore advantageous if there is as little drag in the downwards direction as possible. Conversely, as the port side rises, the tubes on the port side are required to move upwards through the water. It is therefore advantageous if there is as much drag in the upwards direction as possible.

30

Other cross sectional shapes may also be envisaged and these shapes will have different effects on the speed and acceleration of the tubes in the water, as the vessel rolls.

It is particularly advantageous if the size and shape of the tubes takes into account the use of the tubes in other applications. Additionally, the storage of the tubes should be considered. For example, in the field of offshore oil and gas, the tubes may be storable horizontally on the deck of a stationary structure, on a vessel or on shore. Alternatively, the tubes may be stored in the sea when they are not in use.

When considering the effect of the stabilizing apparatus on the rolling motion of the vessel, there are two factors to be considered: the frequency of the rolling motion and the amplitude of the rolling motion. The natural frequency of the rolling is dependent on the mass of the system, since, as the mass of the tubes increases, the natural period of the rolling motion of the vessel increases. The amplitude of the rolling is dependent on the damping forces applied to the system and as the damping force increases, the amplitude will decrease i.e. the amplitude is dependent on the geometry of the tubes. Thus, as the diameter of the tubes and the size of the fins increases, the amplitude of the rolling motion of the vessel decreases.

Referring to Figure 13, the effect of the stabilizing apparatus can be seen very clearly. Figure 13 shows the amplitude of rolling as a function of the period of the applied wave motion. The top plot is the base case i.e. the vessel without any stabilizing apparatus. It can be seen that the natural period of the vessel is close to 10 s. The middle plot is the middle case i.e. the vessel fitted with stabilizing apparatus in which the tubes have a diameter of 3m and the fins project 500 mm. It can be seen that the natural period of the vessel is close to 11 s. The bottom plot is the bottom case i.e. the vessel fitted with stabilizing apparatus in which the tubes have a diameter of

5m and the fins project 500 mm. It can be seen that the natural period of the vessel is close to 12 s.

Thus, it can be seen clearly from Figure 13 that the effect of the stabilizing apparatus is to reduce the amplitude of the rolling motion of the vessel (i.e. the peak of the curves decreases) and to increase the period of the rolling motion of the vessel (i.e. the peak of the curves moves to the right in the x-direction).

10

The description above is somewhat simplified and, as previously mentioned, there are many other variables which will affect the amplitude and period of the rolling motion e.g. the cross-sectional shape of the tubes and the size and shape of the fins.

15

CLAIMS

1. A vessel comprising a first stabilizer assembly and
a second stabilizer assembly, each stabilizer assembly
5 comprising:

at least one submergible at least partially hollow
body; and

suspending means for suspending the or each body
from the vessel,

10 the first and second stabilizer assemblies being suspended
from substantially opposite sides of the vessel.

2. A vessel according to claim 1 wherein the first
stabilizer assembly comprises:

15 a first submergible at least partially hollow body
and a second submergible at least partially hollow body;

first suspending means for suspending the first
body from the vessel; and

20 second suspending means for suspending the second
body from the first body.

3. A vessel according to claim 1 or claim 2 wherein
the second stabilizer assembly comprises:

25 a first submergible at least partially hollow body
and a second submergible at least partially hollow body;

first suspending means for suspending the first
body from the vessel; and

second suspending means for suspending the second
body from the first body.

30

4. A vessel according to any preceding claim further
comprising a third stabilizer assembly, the third
stabilizer assembly comprising:

at least one submergible at least partially hollow body; and

suspending means for suspending the or each body from the vessel.

5

5. A vessel according to claim 4 wherein the first stabilizer assembly is suspended near the bow of the vessel on one side, the third stabilizer assembly is suspended near the stern of the vessel on said one side and the second stabilizer assembly is suspended amidships on the other side of the vessel.

10

6. A vessel according to claim 4 or claim 5 wherein the third stabilizer assembly comprises:

15

a first submergible at least partially hollow body and a second submergible hollow body;

first suspending means for suspending the first body from the vessel; and

20

second suspending means for suspending the second body from the first body.

7. A vessel according to any one of claims 4 to 6 further comprising a fourth stabilizer assembly, the fourth stabilizer assembly comprising:

25

at least one submergible at least partially hollow body; and

suspending means for suspending the or each body from the vessel.

30

8. A vessel according to claim 7 wherein the first stabilizer assembly is suspended near the bow of the vessel on one side, the second stabilizer assembly is suspended near the bow of the vessel on the other side, the third stabilizer assembly is suspended near the stern

of the vessel on said one side and the fourth stabilizer assembly is suspended near the stern of the vessel on the other side.

5 9. A vessel according to any preceding claim wherein the suspending means is capable of bearing high tension loads.

10 10. A vessel according to claim 9 wherein the suspending means is capable of bearing tension loads of more than one hundred times the loads it is capable of bearing in compression.

15 11. A vessel according to claim 9 or claim 10 wherein the suspending means comprises elongate flexible members.

12. A vessel according to claim 11 wherein the elongate flexible members are chains.

20 13. A vessel according to any preceding claim wherein each body is of elongate shape and has a cross-sectional area greater than 4 m².

25 14. A vessel according to any preceding claim wherein each body comprises one or more closed or closable spaces having a combined volume of more than 50 m³.

15. A vessel according to any preceding claim wherein each body comprises at least one ballast tank.

30

16. A vessel according to claim 15 wherein each body comprises a plurality of ballast tanks, each separately ballastable.

17. A vessel according to any preceding claim wherein each stabilizer assembly further comprises at least one fin projecting from the or each body.

5 18. A vessel according to claim 17 wherein the at least one fin is pivotable relative to the or each body to restrict movement of the body upwardly through water more than downwardly.

10 19. A vessel according to any preceding claim wherein each body is substantially prism shaped.

20. A vessel according to claim 19 wherein the prism has a round, preferably circular, cross section.

15

21. A vessel according to claim 19 wherein the prism has a rectangular cross section.

20 22. A vessel according to claim 21 wherein the prism has a square cross section.

23. A vessel according to claim 19 wherein the prism has a triangular cross section.

25 24. A vessel according to any one of claims 19 to 23 wherein one or both ends of the prism is substantially conical.

30 25. A vessel according to any preceding claim, further comprising saddles for attaching to the vessel, to support the suspending means.

26. A vessel according to any preceding claim wherein the suspending means of the first stabilizer assembly is

connected to the suspending means of the second stabilizer assembly.

27. A vessel as herein before described with reference
5 to Figures 1 to 3, Figures 4 to 5 or Figures 6 to 7.

28. An apparatus for reducing vessel motion comprising
a
first stabilizer assembly and a second stabilizer
10 assembly, each stabilizer assembly comprising:
at least one submergible at least partially hollow
body; and
suspending means for suspending the or each body
from the vessel,
15 the first and second stabilizer assemblies being suitable
for locating at substantially opposite
portions of the vessel.

29. An apparatus according to claim 28 wherein each
20 body is of elongate shape and has a cross-sectional area
greater than 4 m^2 .

30. An apparatus according to claim 28 or 29 wherein
each body comprises one or more closed or closable spaces
25 having a combined volume of more than 50 m^3 .

31. An apparatus according to claim 30 wherein the or
each body comprises at least one ballast tank.

30 32. An apparatus according to claim 31 wherein the or
each body comprises a plurality of ballast tanks, each
separately ballastable.

33. An apparatus according to any one of claims 30 to 32 wherein each stabilizer assembly further comprises at least one fin projecting from the or each body.

5 34. An apparatus according to claim 33 wherein the at least one fin is pivotable relative to the or each body to restrict movement of the body through water in one direction more than in another direction.

10 35. An apparatus according to any one of claims 30 to 34 wherein the or each body is substantially prism shaped.

15 36. An apparatus according to claim 35 wherein the prism has a circular cross section.

37. An apparatus according to claim 35 wherein the prism has a rectangular cross section.

20 38. An apparatus according to claim 37 wherein the prism has a square cross section.

25 39. An apparatus according to claim 35 wherein the prism has a triangular cross section.

40. An apparatus according to any one of claims 35 to 39 wherein one or both ends of the prism are substantially conical.

30 41. An apparatus according to any one of claims 30 to 40, further comprising saddles for attaching to the vessel, to support the suspending means.

42. An apparatus according to any one of claims 30 to 41 wherein the suspending means of the first stabilizer assembly is connected to the suspending means of the second stabilizer assembly.

5

43. A vessel comprising a stabilizing apparatus according to any one of claims 30 to 42.

44. A submergible body in the form of an at least partially hollow tube, for reducing motion of a water-borne vessel comprising:

at least one ballast tank; and

at least one projecting fin for increasing the drag of the body through water.

15

45. A body according to claim 44 wherein the body is of elongate shape and has a cross-sectional area of 4 m^2 .

46. A body according to claim 44 or claim 45 wherein each body comprises one or more closed or closable spaces having a combined volume of more than 50 m^3 .

20

47. A body according to any one of claims 44 to 46 wherein the body comprises a plurality of ballast tanks, each separately ballastable.

25

48. A body according to any one of claims 44 to 47 wherein the tube has a round, preferably circular, cross section.

30

49. A body according to any one of claims 44 to 47 wherein the tube has a rectangular cross section.

50. A body according to claim 49 wherein the tube has a square cross section.

51. A body according to any one of claims 44 to 47 wherein the tube has a triangular cross section.

52. A body according to any one of claims 44 to 51 wherein one or both ends of the tube are substantially conical.

53. A body according to any one of claims 44 to 52 wherein the or each fin is pivotable relative to the tube to restrict movement of the body through water in one direction more than in another direction.

54. A body as hereinbefore described with reference to Figures 8 to 9, 10, 11 or 12.

55. A stabilizing apparatus comprising a body according to any one of claims 44 to 52.

56. A method for reducing motion of a water-borne vessel comprising:

suspending at least two at least partially hollow bodies below the water line from substantially opposite sides of the vessel.

57. A method according to claim 56 further comprising ballasting the or each body.

58. A method according to claim 57 or claim 58, in which the vessel is according to any one of claims 1 to 27 or 43.

FIGURE 1

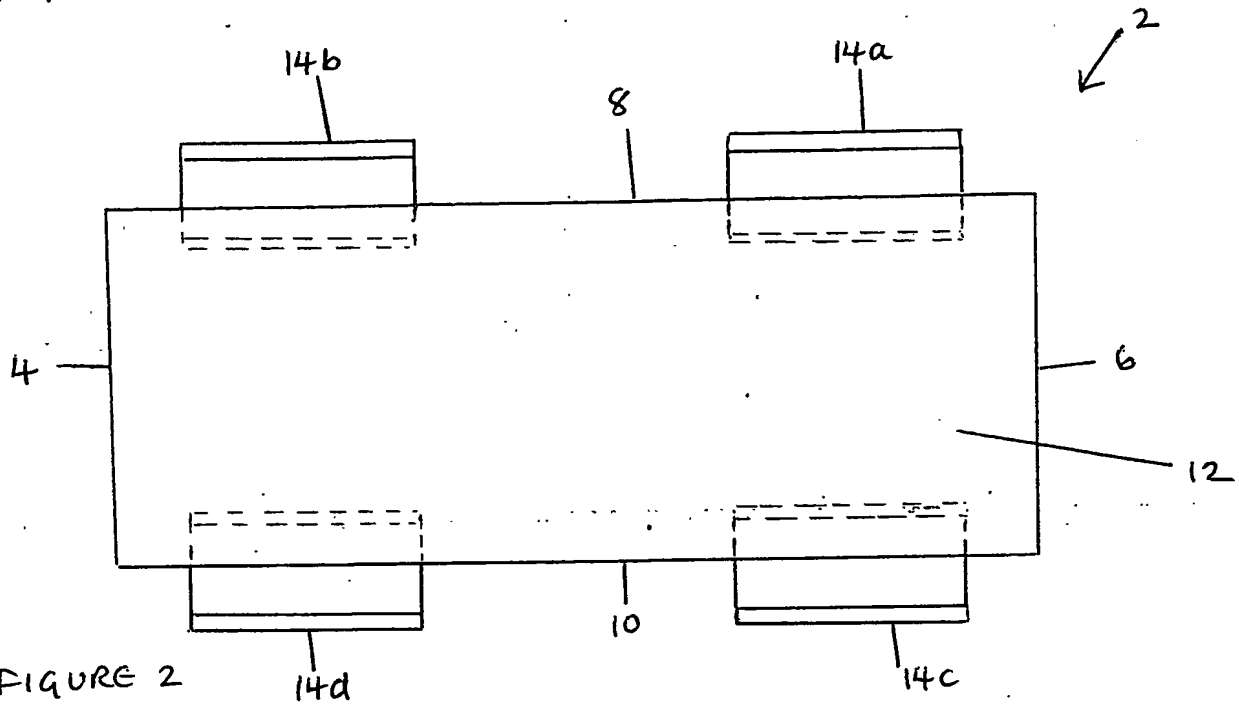


FIGURE 2

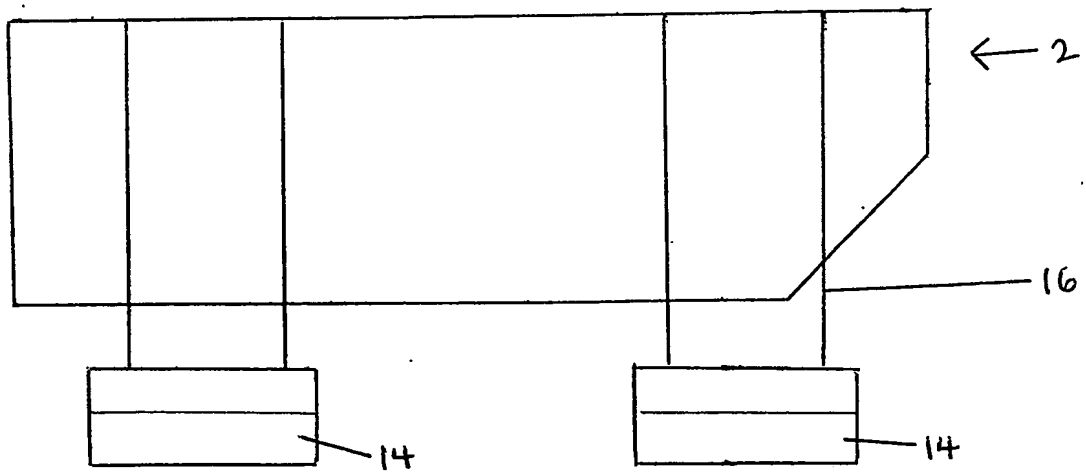


FIGURE 3

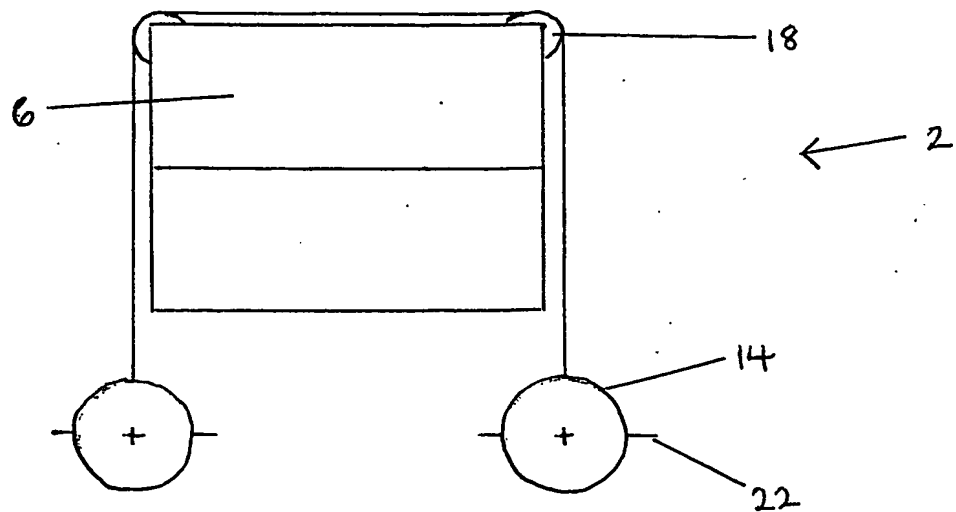


FIGURE 4


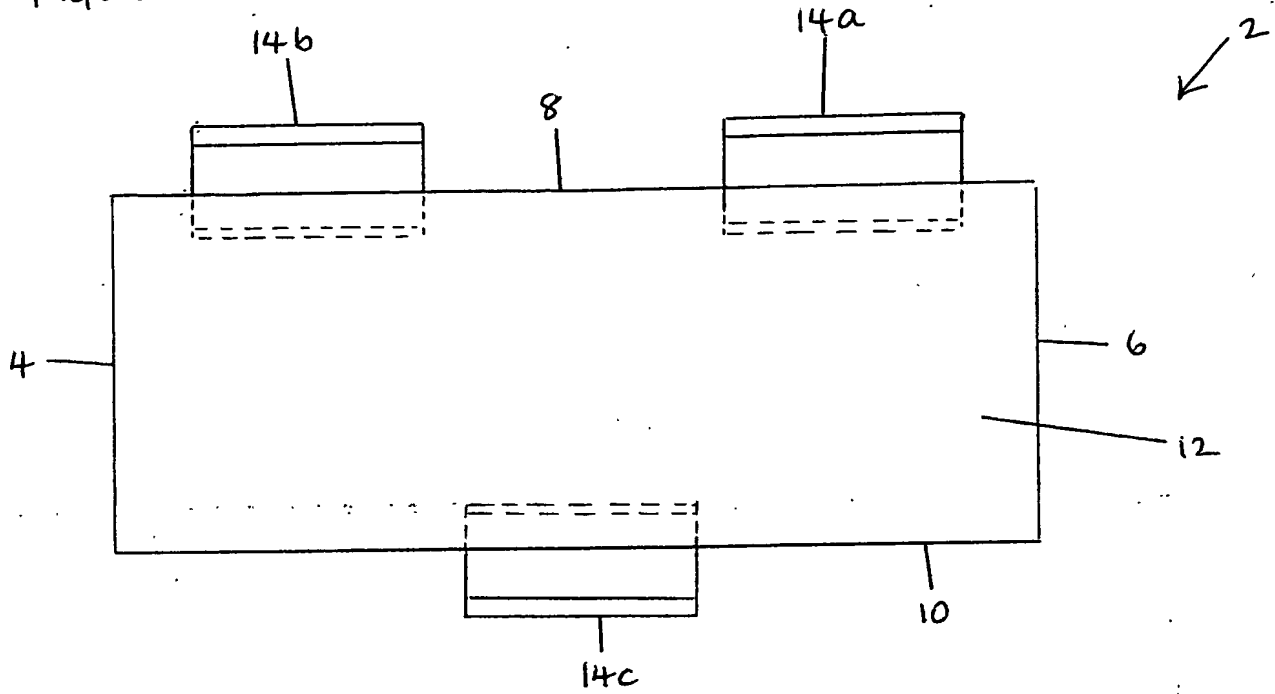


FIGURE 5

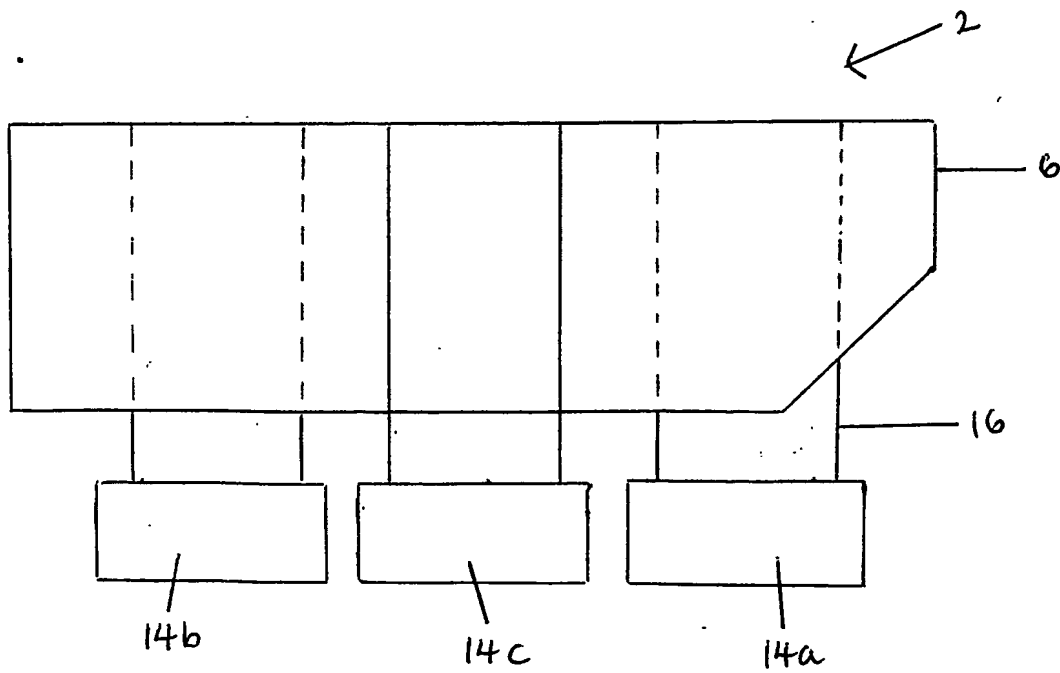

316

FIGURE 6

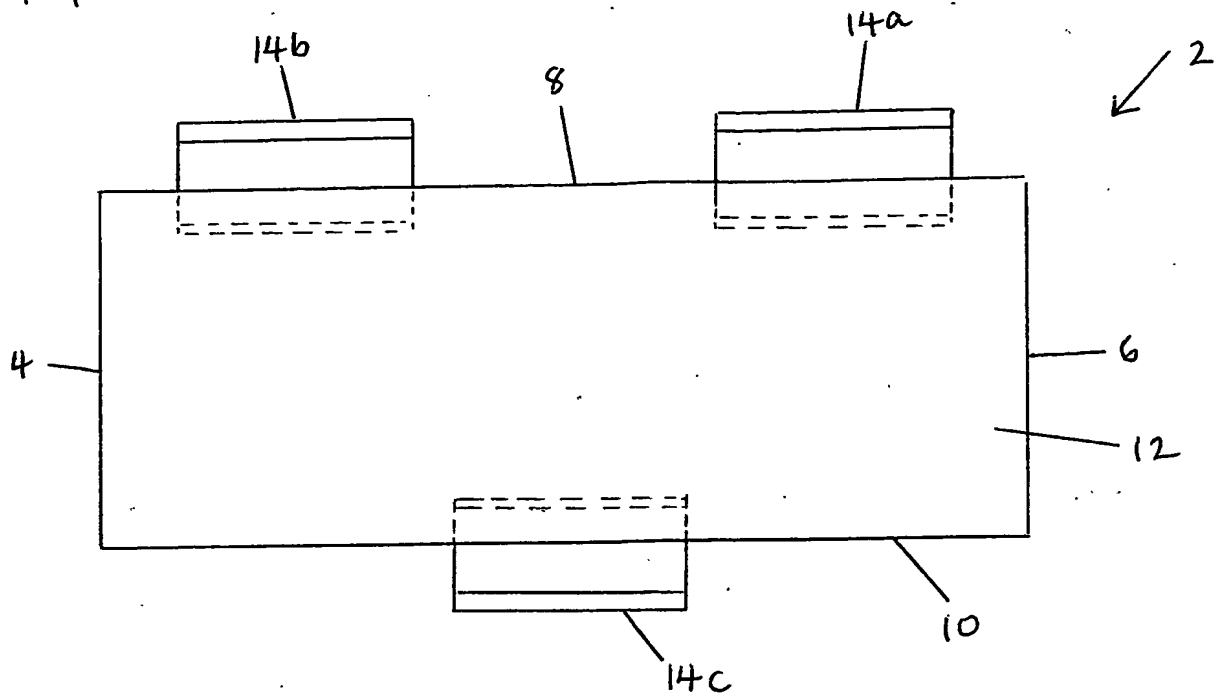


FIGURE 7

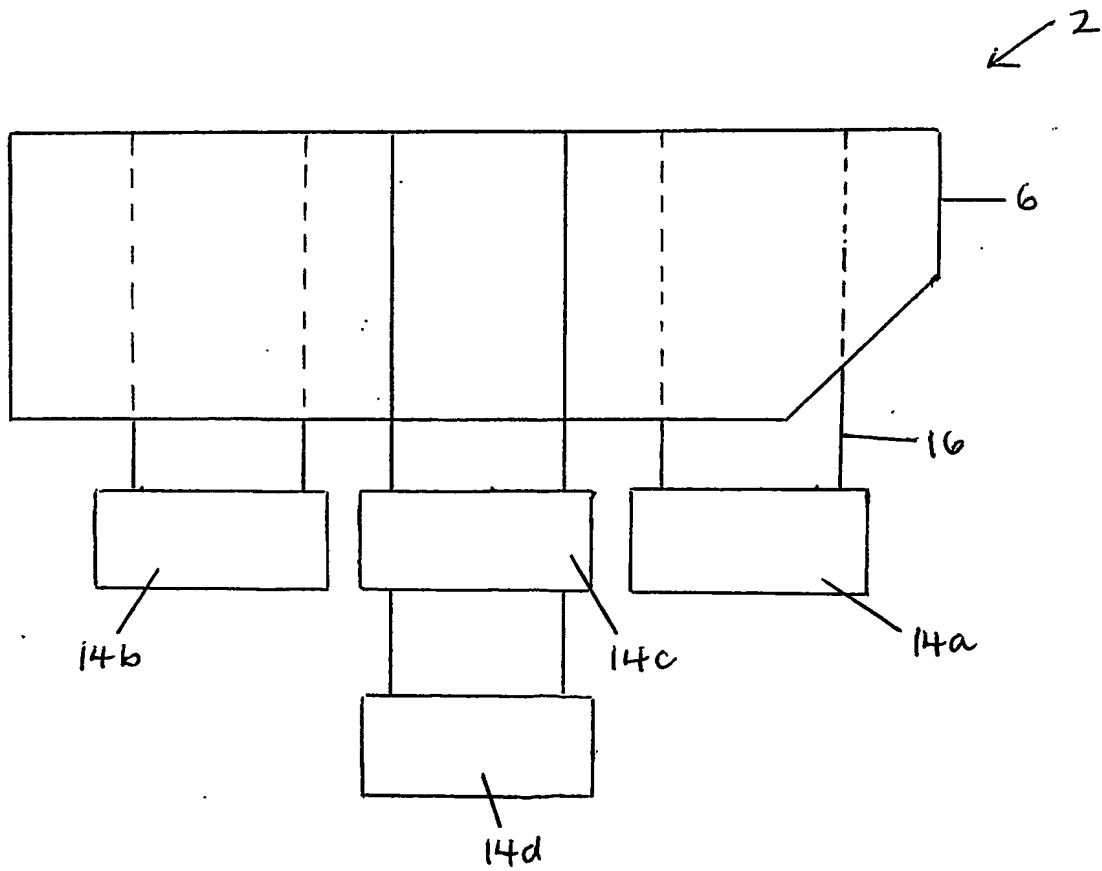


FIGURE 8

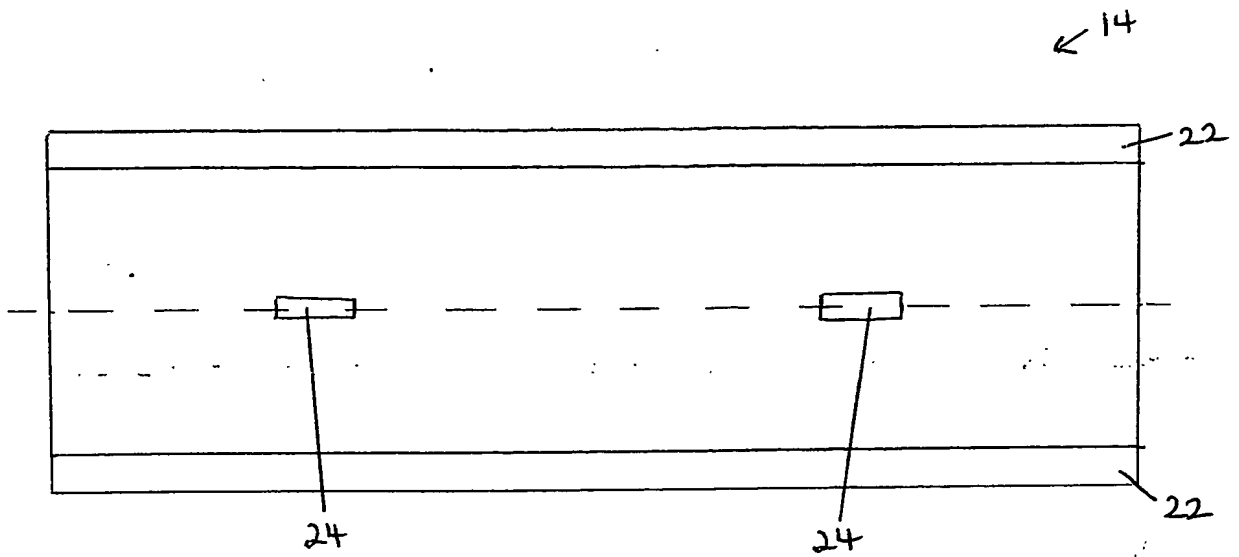


FIGURE 9

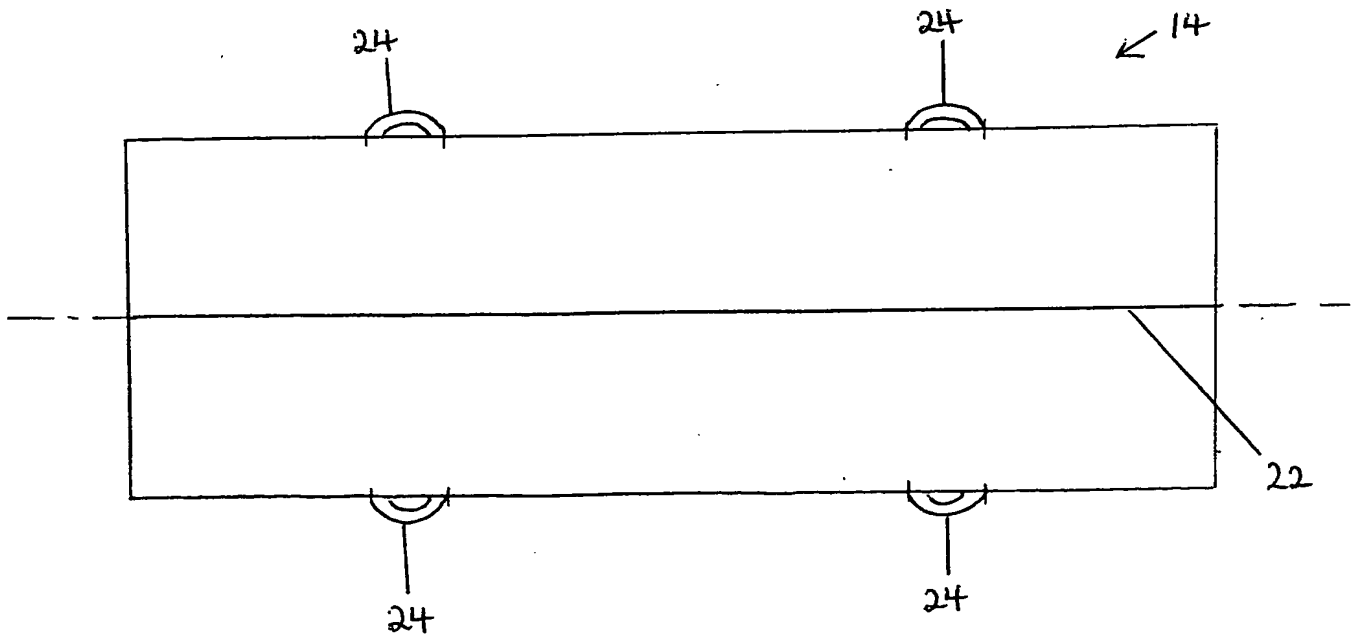


FIGURE 10

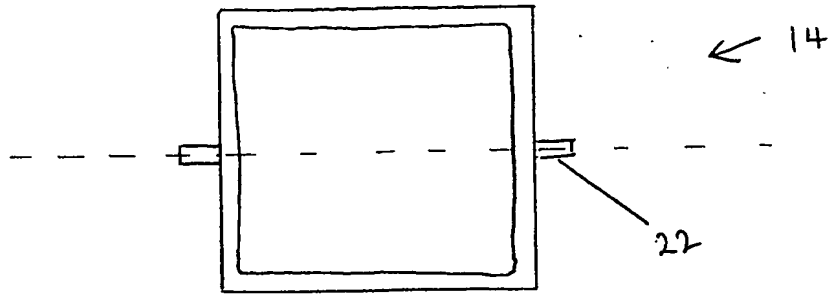


FIGURE 11

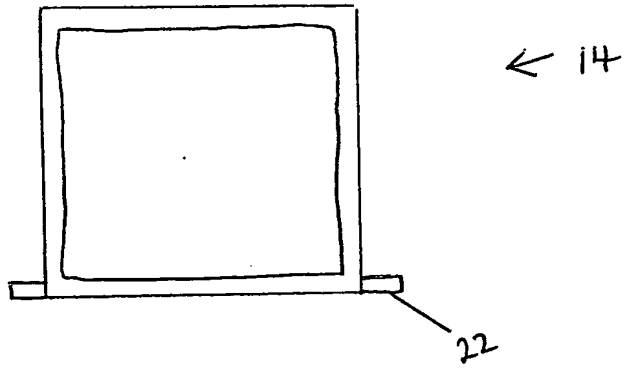


FIGURE 12

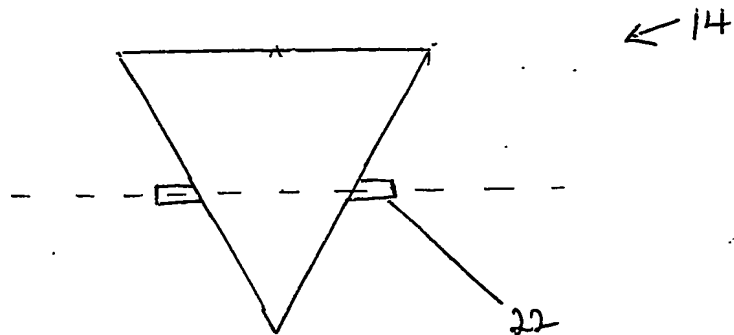


FIGURE 13

